



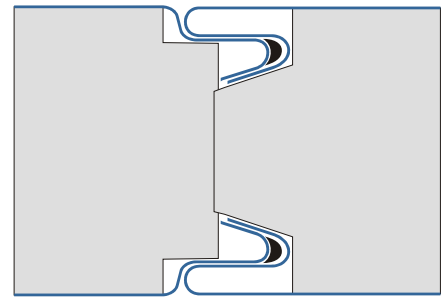

- 15.09.2010 .
: - (« »)
: « », .

,	50	80	100	120	150	180	200	250
1 ² 18%	1070	1210	1300	1400	1540	1680	1780	2020

,
- 0,6 , .1 0,5 0,7 . - 275 /².
: 50, 80, 100, 120, 150, 180, 200 250 .
- 1 190 .
: 2 500 12 000 .
" " " Z-LOCK, , -

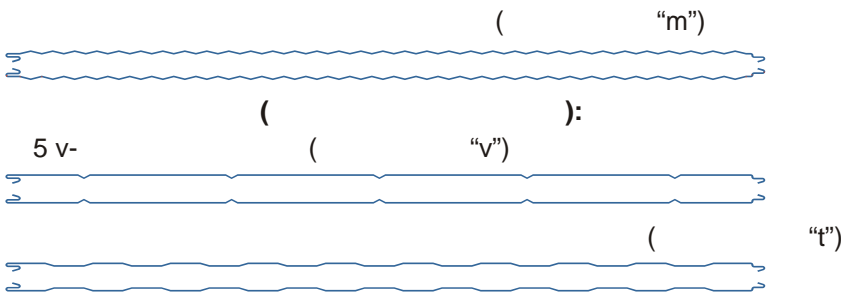

RAL.

- RAL 9003 – RAL 6002 – RAL 7047 – -
- RAL 9002 – RAL 1014 – RAL 1015 – - RR20 –
- RAL 5005 – RAL 9006 – RAL 1018 – - RR21 –
- RAL 7004 – RAL 3003 – RAL 5012 – - RR35 –

RAL.

80 .

1²

: 136 – 263 .

1² (

().

EN 14509:2006.

26602.2-99

Ruukki

« »

- 1.
- 2.
- 3.
- 4.

100²

6 000

18%.